

Installation Instructions Rear Bumper

Product Number: W1250 Application: '99-07 Classic GM Heavy Duty

SAFETY

Your safety and the safety of others is very important.

- In order to help you make informed decisions about safety, we have provided installation instructions and other information.
- These instructions alert you to potential hazards that could hurt you or others.
- Please do a job safety analysis (JSA) before each task to identify potential hazards for your situation and remove/protect against them.
- You must use your own good judgment, and take your time.

Read and understand all safety precautions and instructions before installing this product.

THIS PRODUCT IS FOR OFFROAD USE ONLY. ALL LIABILITY FOR INSTALLATION AND USE RESTS WITH THE OWNER.

CARELESS INSTALLATION AND OPERATION CAN RESULT IN SERIOUS INJURY OR EQUIPMENT DAMAGE.

Injury hazard

Failure to observe these instructions could lead to severe injury or death.

- Always remove jewelry and wear eye protection.
- Always use extreme caution when jacking up a vehicle for work. Set emergency brake and use tire blocks. Locate and use the vehicle manufacturers designated lifting points. Use jack stands.

- **Always** use appropriate and adequate care in lifting components into place.
- **Always** ensure components will remain secure during installation and operation.
- □ Always wear safety glasses when installing this kit. A drilling operation will cause flying metal chips. Flying chips can cause serious eye injury.
- Always use extreme caution when drilling on a vehicle. Thoroughly inspect the area to be drilled (on both sides of material) prior to drilling, and relocate any objects that may be damaged.
- **Always** use extreme caution when cutting and trimming during fitting.
- **Always** tighten all nuts and bolts securely per installation instructions.
- Always route electrical cables carefully. Avoid moving parts, components that become hot and rough or sharp edges.
- **Always** insulate and protect all exposed wiring and electrical terminals.
- Always perform regular inspections and maintenance on mounts and related hardware.



Page 1 of 7



Installation Instructions Rear Bumper


Product Number: W1250 Application: '99-07 Classic GM Heavy Duty

I. Overview

Congratulations on your new purchase of the industries' best and most stylish GM Rear Bumper! This bumper has been **engineered** for strength while keeping the weight down.

Your bumper was designed in 3-D from digitized data, CNC laser cut, fabricated, and powder coated... all in the U.S.A.

Enjoy the fit and finish of a quality GM Rear Bumper from Fab Fours Inc.

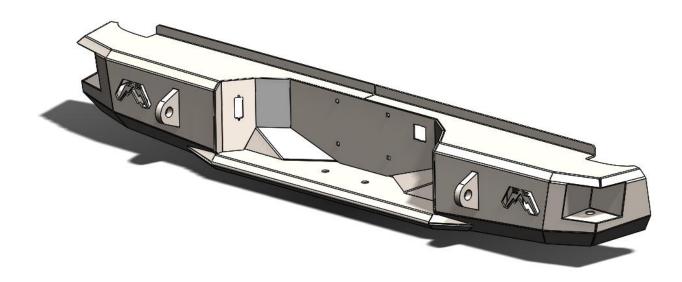



Page 2 of 7



Installation Instructions Rear Bumper

Product Number: W1250 Application: '99-07 Classic GM Heavy Duty

II. Tools Needed

- 3/4", ¹/₂", 13/16" Socket
- 3/4" Wrench
- Socket wrench
- Regular Screwdriver

III. <u>Removal</u>


- □ A) Remove license plate, and OEM license plate lights. If so equipped, unplug back-up sensors and seal OEM connector with tape; affix to frame.
- **B**) Remove OEM bumper fasteners and OEM bumper. Set aside.
- **C**) Remove OEM Spare Tire Access Cover from bumper. Set aside.

IV. <u>Bumper Preparation</u>

- □ A) Lay out Fab Fours bumper and install factory license plate lights in provided locations.
- **B**) Install license plate inserts in provided locations.
- C) *When experiencing a hyper flash or when replacing halogen lights with led lights a resistor should be used. The resistor will wire into the positive power supply to the light and the negative side of the ground supply to the light.



Page 3 of 7

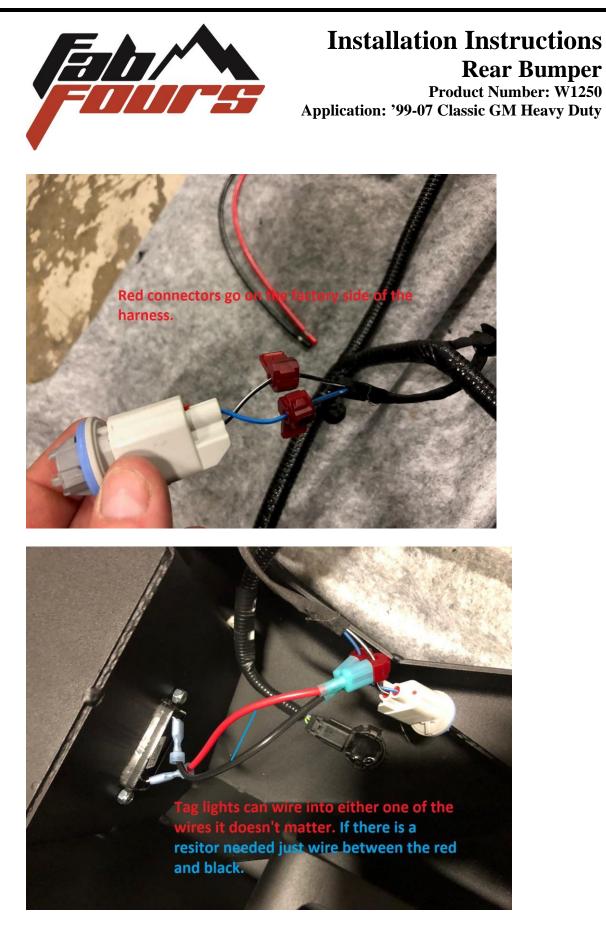




Page 4 of 7



Installation Instructions Rear Bumper Product Number: W1250

Product Number: W1250 Application: '99-07 Classic GM Heavy Duty

D) Install OEM Spare Tire Access Cover in provided location.



V. <u>Bumper Installation</u>

- □ A) Install bumper mounts onto bumper as shown using supplied mounting hardware: bolts, washers, and nuts. Do not tighten fully. Verify that the triangular flange points upward and middle flange faces outward. Repeat for other side.
- □ B) Install provided 9/16 bolts to the slots of the hitch to secure hitch to frame. (Warning: If this is not done it will change max tongue weight, and result in hitch failure.)





Fab Fours Inc. Copyright 2008 Fab Fours, Inc.

Page 5 of 7




Installation Instructions Rear Bumper Product Number: W1250

Product Number: W1250 Application: '99-07 Classic GM Heavy Duty

□ C) Place two of the provided spacers over each hole on receiver plate for bumper to rest on during install, and use provided ¹/₂-13 X 1 ³/₄ bolts to secure bumper to receiver plate.

□ D) Bolt bumper to frame using supplied hardware: bolts, washers, and nuts. Repeat for other side. Align Spare Tire Access Cover with guide tube.

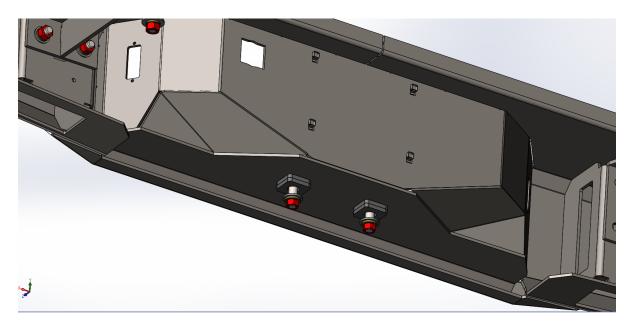

- **E**) Align bumper front to back and tighten frame mount fasteners.
- □ F) Align bumper height side-to-side, verify tailgate clears while lowered, and tighten bumper mounting fasteners using a socket and wrench.
- **G**) Plug in license plate light harness and secure to frame rails.
- **H**) Re-install license plate.



Page 6 of 7



Installation Instructions Rear Bumper

Product Number: W1250 Application: '99-07 Classic GM Heavy Duty

VII. Maintenance/Care


D Periodically check and tighten all fasteners.

□ Stripped, fractured, or bent bolts or nuts need to be replaced.

VIII. <u>Contact Information</u>

Fab Fours Inc.Ph1312 Camp Creek Rd.FaLancaster, SC 29720Er

Phone	(866)-385-1905
Fax	(866)-574-1424
Email	Support@fabfours.com

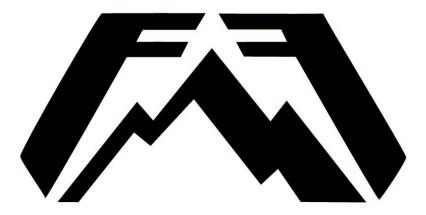

More than expected... Better than expected



Page 7 of 7